

PHBN172351-SM

Intensify the uniqueness and branding to stand out



Product Features

- Excellent glare control
- The special optical system delivers a precise circular distribution without punctiform effect
- Square surface-mount housing in classical design

Main application

- Hotel lobby
- Entrance hall
- Airport terminal
- Circulation area
- Exhibition hall


Technical specifications

Prouduct item	PHBN172351-SM-1	PHBN172351-SM-2
Installation	Surfaced-mounted	
Housing color	BK, WH	
Power supply	220-240VAC/50-60Hz	
Watt(W)	11	2*11
Lumen LED(lm)	1100	2*1100
System efficacy(lm/w)	>90	
CCT	2700K,3000K,3500k,4000K,5000K	
CRI	80, 90	
SDCM	«3	
Beam angle(°)	15, 25, 35	15, 25, 35
Lifetime	30,000 hrs	
Protection class	IP20	
Material	Alunimun	



Product dimension(mm)

PHBN172351-SM-1

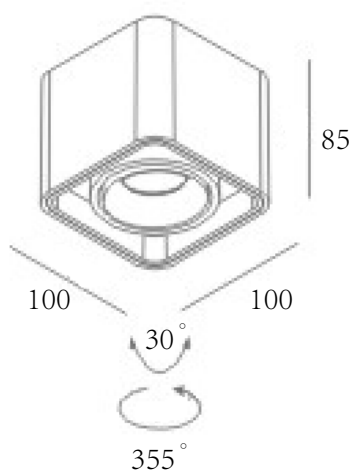

PHBN172351-SM-2

