



Product Features

- Integrated heat-dissipating structure lamp body to ensure stable operation of lamps
- Built-in high-efficiency power supply, passed the 240-hour aging test at 85 °C and 85% temperature before delivery
- Professional optical lens to maximize the light to be projected
- The end cap has a scale and also precisely and flexibly adjusts the light transmission angle

Main application


- Building contour
- Building shooting face
- Building facade
- Scene lighting

Technical specifications

Product item	PHBN180016-WW
Installation	Rack mounting
Housing material	Aluminium
Power supply	AC 220V, DC 24V, DC 36V
Watt(W)	60W
Lumen LED(lm)	4500lm
System efficacy(lm/w)	75lm/w
CCT	1700K ~ 6000K
Control	DMX512
Beam angle(°)	3° 、 5°
Lifetime(hrs)	50,000 hrs
Protection class	IP67
Ambient temperature	-40 °C - +50 °C

Product dimension(mm)

PHBN180016-WW

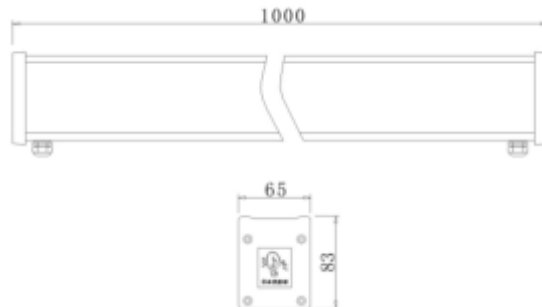

Size: L1000xW65xH83mm