



Product Features

- Integrated heat-dissipating structure lamp body to ensure stable operation of lamps
- Built-in high-efficiency power supply, passed the 240-hour aging test at 85 °C and 85% temperature before delivery
- Professional optical lens to maximize the light to be projected
- The end cap has a scale and also precisely and flexibly adjusts the light transmission angle

Main application


- Building contour
- Building shooting face
- Building facade
- Scene lighting

Technical specifications

Product item	1	2	3	4	5
Installation	Rack mounting				
Housing material	Aluminium				
Power supply	AC220V, DC 24V, DC 36V				
Watt(W)	12W	18W	48W	48W	48W
Lumen LED(lm)	900lm	1350lm	3600lm	3600lm	3600lm
System efficacy(lm/w)	75	75	75	75	75
CCT	1700K ~ 6000K		RGB	RGB	RGBW
Control	DMX512				
Beam angle(°)	20°、 30°、 40°、 80°、 25x45°				
Lifetime(hrs)	50,000 hrs				
Protection class	IP67				
Ambient temperature	-40 °C - +50 °C				

Product dimension(mm)

PHBN180019-WW

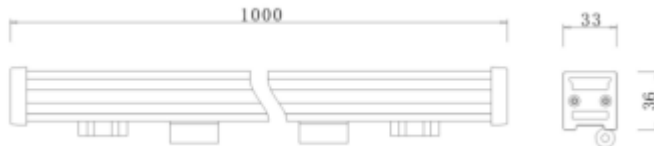

Size: L1000xW33xH36mm